



12F., NO. 168, Jiankang Rd., Zhonghe Dist., New Taipei City 23585, Taiwan (R.O.C)
TEL:+886-2-8228-1238 FAX:+886-2-8228-7123 www.silverstonetek.com

The screenshot displays the ASMTxHCI_MPTool Ver1.3.0.0 interface. At the top, there are buttons for 'Save INI', 'Load INI', and a file path 'C:\Users\PC\Desktop\ASMP TOOL\ASMTxHCI_MPToolv1300\ASMTxHCIMPTool.ini'. A red box highlights the 'Unlock MP Tool' button. The 'asmedia' logo is in the top right corner.

The 'MainPage' tab is active. It contains checkboxes for 'FW Update Enable' and 'FW Check Enable', both of which are checked. Below these is a 'Firmware Browser' dropdown menu and a 'Firmware Info' button. There is also a 'Sub_Sys' section with 'SSID' (1B21) and 'SVID' (1142) fields.


A 'Login' dialog box is open in the center. It has a title bar with a close button (X). The dialog contains a 'Password' label and a text input field with six asterisks (*****). At the bottom of the dialog are 'Ok' and 'Cancel' buttons.

At the bottom of the main window is a table with the following columns: H#, FW Version, WRSR, Bus, Dev, Fun, SSID, SVID, PCIe Link, Update, Check, and an empty column. The first row contains the following data: 1, 150707300200, 0x00, 2, 0, 0, 1242, 1B21, 0x02, and empty cells for the remaining three columns.

At the very bottom, there are buttons for 'Rescan', 'Create New File', and 'Start'.



12F., NO. 168, Jiankang Rd., Zhonghe Dist., New Taipei City 23585, Taiwan (R.O.C)
TEL: +886-2-8228-1238 FAX: +886-2-8228-7123 www.silverstonetek.com

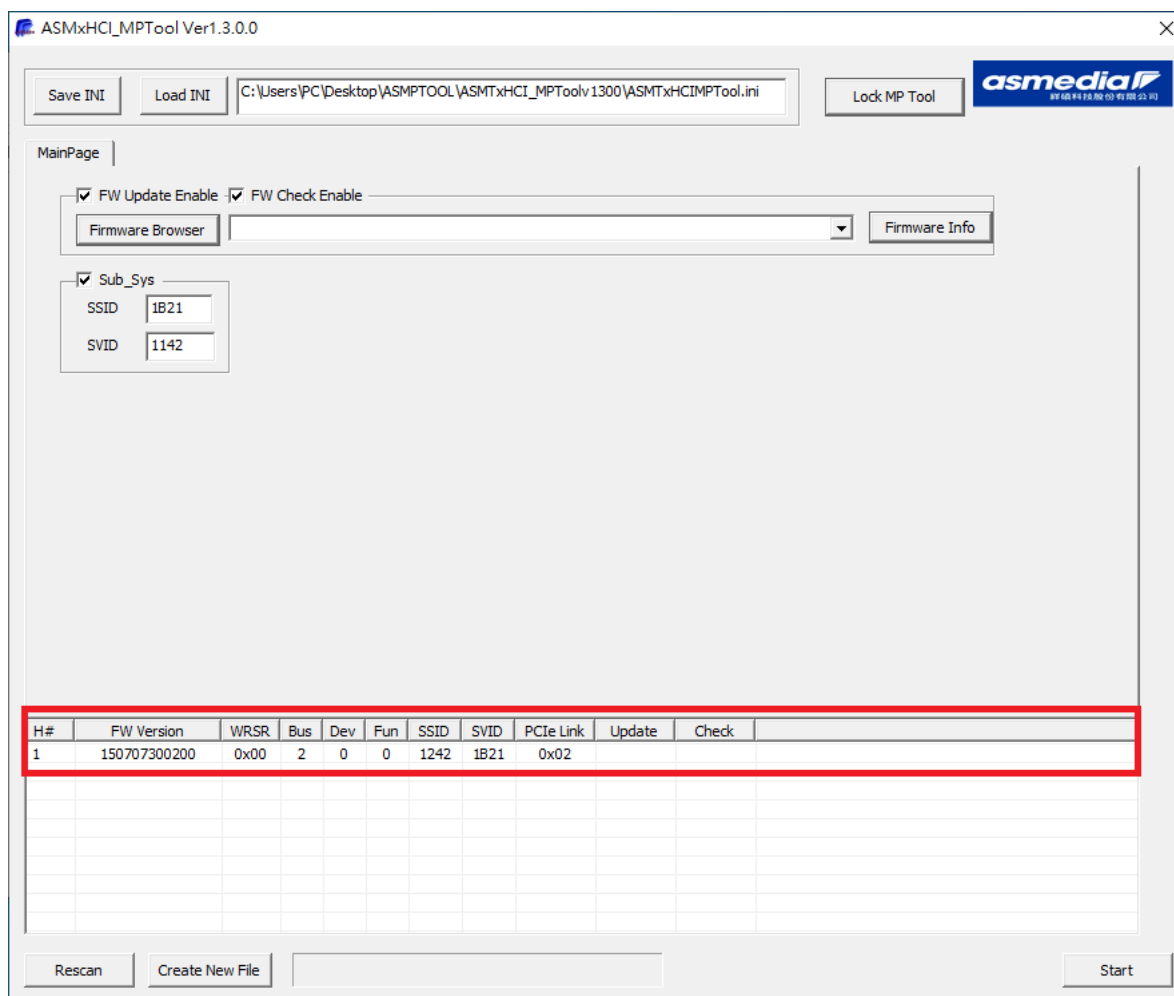



Do not change any operation settings.

[illegible]



12F., NO. 168, Jiankang Rd., Zhonghe Dist., New Taipei City 23585, Taiwan (R.O.C)
TEL:+886-2-8228-1238 FAX:+886-2-8228-7123 www.silverstonetek.com

Click **Start** to update the firmware.

[illegible]



12F., NO. 168, Jiankang Rd., Zhonghe Dist., New Taipei City 23585, Taiwan (R.O.C)
TEL:+886-2-8228-1238 FAX:+886-2-8228-7123 www.silverstonetek.com

[illegible]